



COOLING FASCINATION



Refrigerators and freezers for professional use



TS Freezer

FRYKA freezers have a usable space of 100 litres and can be used for cooling and freezing in industrial and scientific laboratories. The 100 litre TS freezer is a classic stand-alone unit. Whether in laboratories or industry, due to the compact, space-saving design combined with a low noise cooling unit, the TS 100 can be directly used in the workplace.

Model	TS 50-100	TS 80-100
Temperature range	-50°C to -10°C	-80°C to -50°C
Control accuracy	+/- 1 K	
Capacity	100 litres	
Interior [WxDxH]	45 x 45 x 50 cm	
External dimensions [WxDxH]	68 x 73 x 116 cm	
Weight	120 kg	
Ambient temperature	+12°C to +30°C	
Electrical connection	230 V / 50 Hz	




Characteristics:

- Vacuum insulation: large interior space with small external dimensions and low power consumption
- All stainless steel casing
- Refrigeration unit: low noise, fully hermetically sealed, air cooled, low maintenance
- TS 80-100: two-stage cascade refrigeration system
- Foamed door with double door seal
- Air vents at front and right, making it suitable for installation under tables
- Control unit with keyboard and integrated, optically isolated, mains-independent alarm (visual and audible signal, showing the maximum temperature during the disturbance, battery lasting around 72 hours)
- Voltage-free alarm contact for connection to an external alarm system
- 10mV/K-output for connection to a temperature recording system
- RS485 interface
- Lockable door
- With inlaid grilles and 4 shelf rails

Accessories:

- TS 100-RS stainless steel shelf
- TSG 30/100 CF Temperature recorder
- Inlaid grills

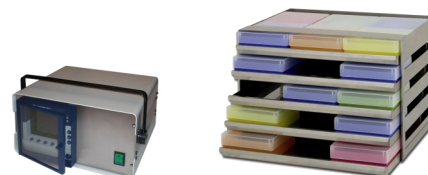

Option:

- 4 fixed rollers, 2 with brakes
- Circulation fan inside (not with TUS 80-100)
- Bushing 19mm
- Your desired option is not listed? Just ask us!

FRYKA-KÄLTETECHNIK GMBH

Ohmstraße 4 // D-73730 Esslingen // **Fon:** +49 (0)711 310599-0 // **Fax:** +49 (0)711 310599-29

E-Mail: info@fryka.de // **Web:** www.fryka.de

FRYKA
Kältetechnik

